TRVT561



tru•vue[™]

Mobile Height Adjustable Trolley

For 32" to 60" LCD/LED Displays

The TruVue TRVT561 provides a sleek & tidy mobile solution for 32"-60" displays. Complete with 2 heavy duty poles to display the screen at a maximum height of 1530mm (60.2").

It's unique and convenient Display height adjustment is complimented by spring plunges allowing the display to be vertically positioned easily.

Complete with cable management, 4 heavy duty braked caster wheels, and a spacious shelf for AV components.



Display size: 32"-60"



FEATURES

- Height Adjustable Max: 1530mm (60.2")
- Universal VESA® 200x200 up to 600x400mm
- Plastic component shelf for AV equipment
- Internal Cable Management; hide cables to provide a tidy look.
- Smooth matt black finish
- Includes height adjustable VC Shelf





Internal Cable Management



Locking height adjustments



TRVT561

TruVue Mobile Height Adjustable Trolley TRVT561


Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
TRVT561	845 x 2043 x 716mm (33.2" x 80.4" x 28.1")	21.5kg (47.3lb)	45.5kg (100lbs)	Powder Coat	Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
TRVT561	985 x 125 x 931mm (38.7" x 4.9" x 36.6")	25.5kg (56.1lb)	735029306894	Trolley, Component shelf, Instructions, Mounting Hardware	1

All dimensions = inch (mm)

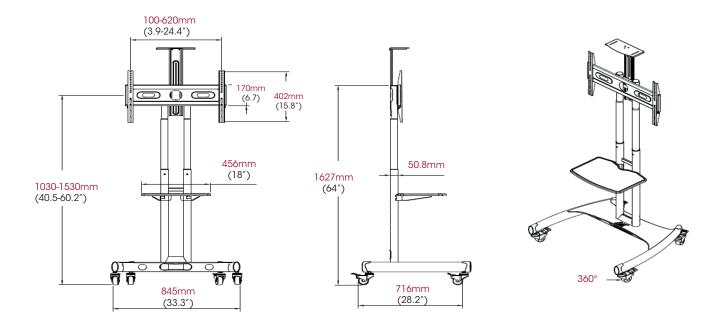

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV 2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500 Peerless-AV Europe Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101 **Peerless-AV de México** Ave de las Industrias 413

Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360

